


4 transistor amplifier - 2 inputs and 2 outputs (1 with DC) with F connection equipped with box for outdoor use and pole connection - with 5G filter



Frequency	UHF: 470 ÷ 694 MHz
Filter	5G: 694 ÷ 862 MHz
Connector	F
UHF band	15 ÷ 30 dB
UHF 2 band	15 ÷ 30 dB
Outputs	1 + 1 cc
Insertion loss	5G: < 20 dB
Max output	107 dBμV
Consumption	90 mA
Noise figure	5 dB
Impedance	75 Ohm
Power supply	12 Vdc

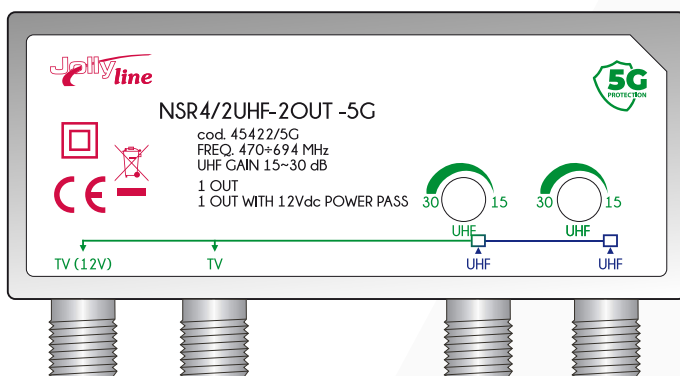

Packaging 13 x 14 x 5 cms



Quantity
in master
carton
30 pz.



Via delle Valli, snc
04011, Aprilia (LT)
www.jollyline.it



8 023389 767496