
AMP4/UHF-2OUT -5G

cod. **XD46423/5G**

Professional 4-transistor amplifier - 2 inputs and 2 outputs (1 with DC power) with F connectors, supplied with outdoor housing and pole mount - with 5G filter



Frequency	UHF: 470 ÷ 694 MHz
Filter	5G: 694 ÷ 862 MHz
Connector	F
UHF band	15 ÷ 30 dB
Outputs	2
Insertion loss	5G: < 20 dB
Max output	107 dBµV
Consumption	90 mA
Noise figure	5 dB
Impedance	75 Ohm
Power supply	12 Vdc

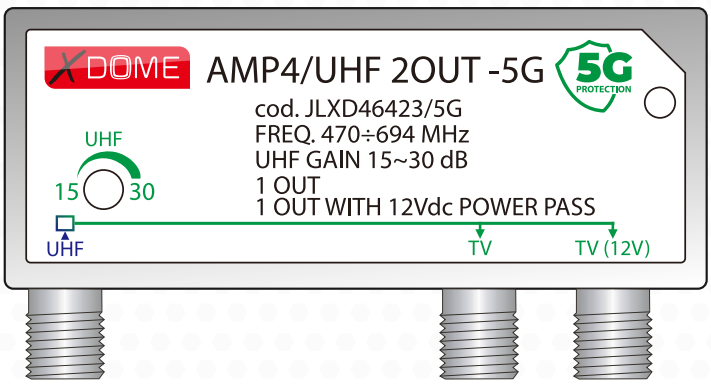



Packaging 12 x 12 x 5 cm

XDOME

Via delle Valli, snc
04011, Aprilia (LT)
www.jollyline.it

Quantity in master carton 30 pcs.

8 023389 796595